



Terminal(EL)

Type	Applicable wires		O.D of wire ins mm	Material	Finish
	mm ²	AWG#			
BM-EL	0.08-0.3	26-18	1.2-1.9	Phos.bronze	Tin-plated

EL-nP

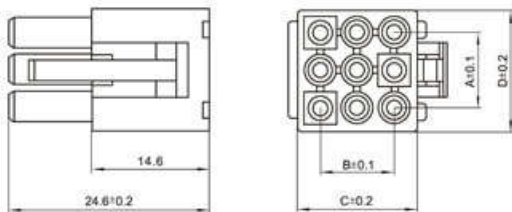

EL-nR

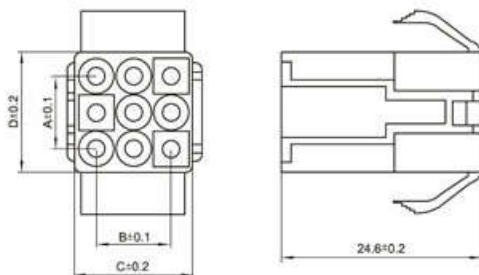


SPECIFICATIONS

Unit:mm


- ◇ Poles: 2, 3, 4, 6, 9, 12, 15
- ◇ Applicable wire: AWG#26-#18
- ◇ Voltage rating: 300V DC/AC
- ◇ Current rating: 10-6A
- ◇ Withstand voltage: 1500V AC
- ◇ Working Temperature: -25°C ~ +85°C
- ◇ Insulation resistance: ≥ 1000MΩ
- ◇ Contact resistance: ≤ 0.015Ω
- ◇ Applicable PC board thickness: 1.6mm

UL:Recognized No.E309635
 RoHS-specification and
 Halogen-free products

EL-PT

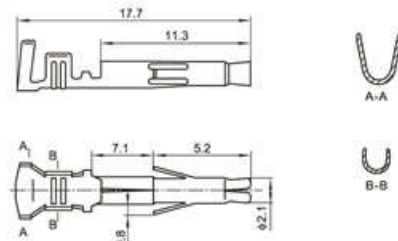

EL-RT

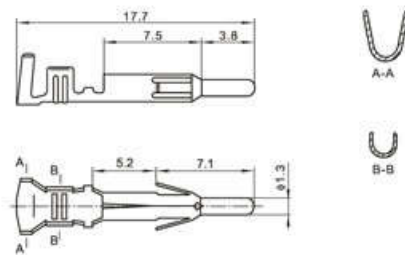

Poles	Type	Size(mm)			
		A	B	C	D
2	EL-2P	4.5	0	5.6	10.3
3	EL-3P	9.0	0	5.6	14.8
4	EL-4P	13.5(4.5)	0(4.5)	5.6(10.3)	19.3(10.3)
6	EL-6P	9.0	4.5	9.9	14.8
9	EL-9P	9.0	9.0	14.4	14.8
12	EL-12P	13.5	9.0	14.4	19.3
15	EL-15P	18.0	9.0	14.4	23.8

Poles	Type	Size(mm)			
		A	B	C	D
2	EL-2R	4.5	0	5.6	10.3
3	EL-3R	9.0	0	5.6	14.8
4	EL-4R	13.5(4.5)	0(4.5)	5.6(10.3)	19.3(10.3)
6	EL-6R	9.0	4.5	9.9	14.8
9	EL-9R	9.0	9.0	14.4	14.8
12	EL-12R	13.5	9.0	14.4	19.3
15	EL-15R	18.0	9.0	14.4	23.8