


P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	RELEASE PER ECR-19-000700	16JAN2019	JS	DD
	A1	REVISED PER ECR-19-003367	05MAR2019	SR	DD
	A2	REVISED PER ECR-19-008525	31MAY2019	SR	DD
	A3	REVISED PER ECR-20-002559	26FEB2020	SB	DD

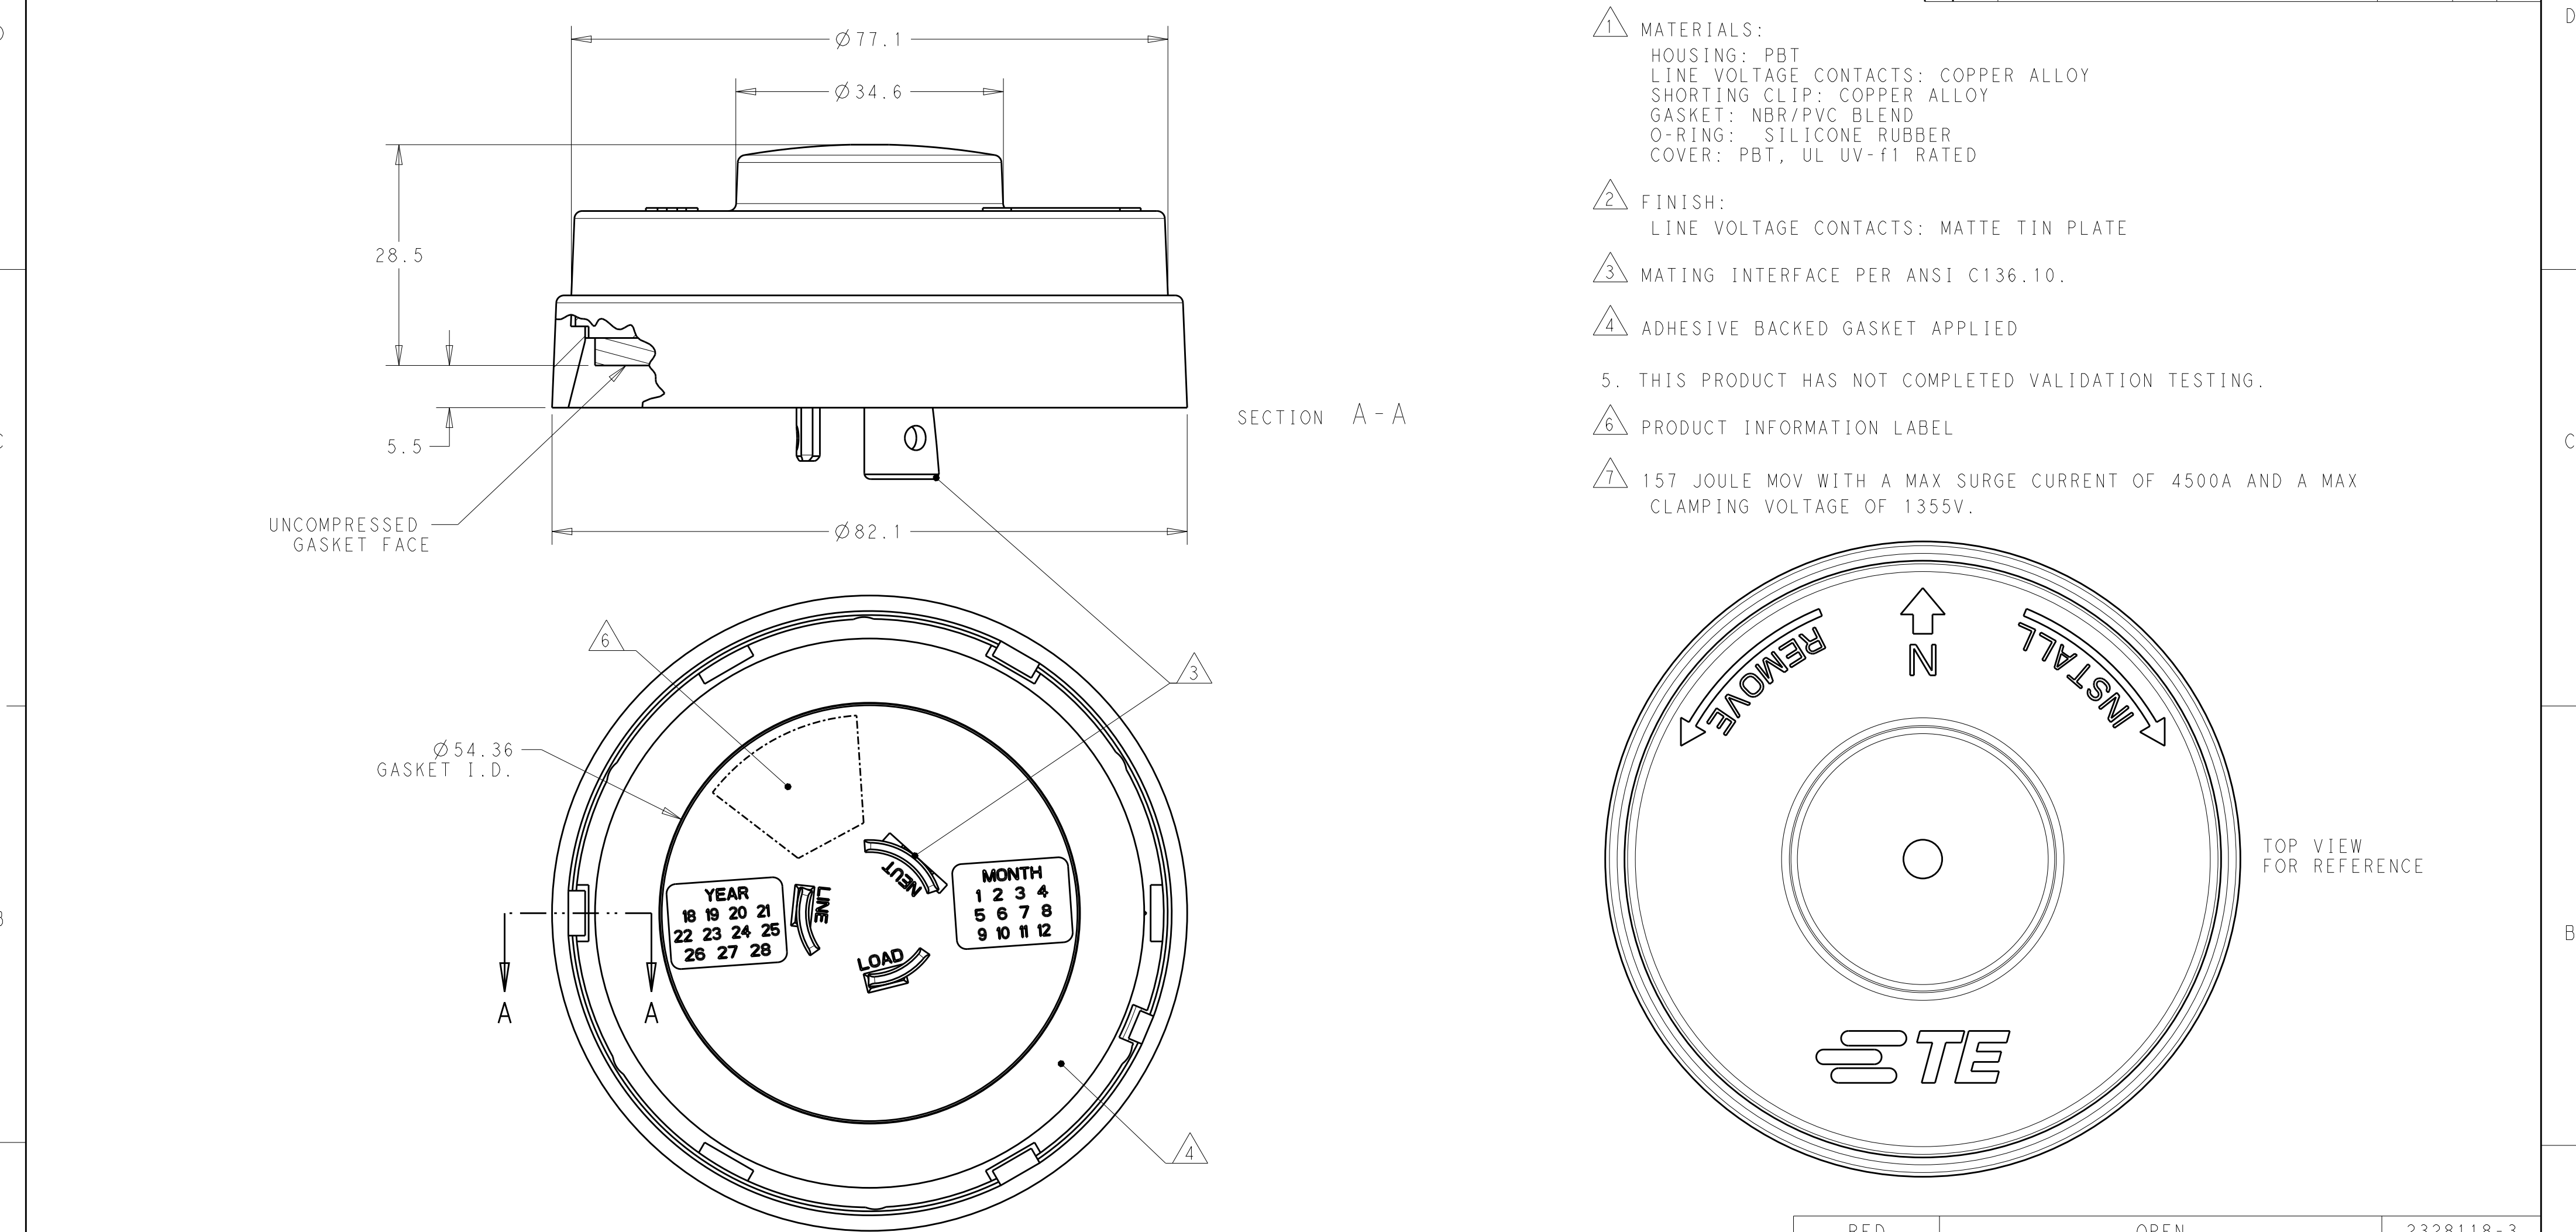

- 1
- MATERIALS:
HOUSING: PBT
LINE VOLTAGE CONTACTS: COPPER ALLOY
SHORTING CLIP: COPPER ALLOY
GASKET: NBR/PVC BLEND
O-RING: SILICONE RUBBER
COVER: PBT, UL UV-f1 RATED
- 2
- FINISH:
LINE VOLTAGE CONTACTS: MATTE TIN PLATE
- 3
- MATING INTERFACE PER ANSI C136.10.
- 4
- ADHESIVE BACKED GASKET APPLIED
5.
- THIS PRODUCT HAS NOT COMPLETED VALIDATION TESTING.
- 6
- PRODUCT INFORMATION LABEL
- 7
- 157 JOULE MOV WITH A MAX SURGE CURRENT OF 4500A AND A MAX CLAMPING VOLTAGE OF 1355V.

RED	OPEN	2328118-3
BLACK	SHORTING AND SURGE PROTECTION	2328118-2
BLACK	SHORTING	2328118-1
CAP COLOR	DESCRIPTION	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C. DAILY 23JAN2018	TE Connectivity	
DIMENSIONS: mm		CHK MSTOLLER 23JAN2018	NAME ASSEMBLY, LUMAWISE SHORTING CAP	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ±0.2 2 PLC ±0.13 3 PLC ± 4 PLC ± ANGLES ±1° FINISH -		APVD - PRODUCT SPEC 108-133113 APPLICATION SPEC 408-133113 WEIGHT - CUSTOMER DRAWING	SIZE A2 CAGE CODE 00779 DRAWING NO C-2328118 RESTRICTED TO - SCALE 7:4 SHEET 1 OF 1 REV A3	